

# Industrial 5G NR Cellular Gateway with 5-Port 10/100/1000T




## Upgrade Industrial Network with 5G NR Cellular Gateway

PLANET ICG-2515-NR is an industrial-grade cellular gateway for demanding mobile applications, M2M (machine-to-machine) and IoT deployments. Upgraded to the latest cellular technology of 5G NR (new radio), the ICG-2515-NR is able to provide ultra-fast broadband access with 5G cellular network. The ICG-2515-NR also features five Ethernet ports (4 LANs and 1 WAN), serial port (RS485), DI and DO interfaces, and VPN technology bundled in a compact yet rugged metal case. It establishes a fast cellular connection between Ethernet and serial port equipped devices. The ICG-2515-NR is particularly ideal for industrial automation, digital factory and other industrial applications.



## Automatic Failover between 5G NR and Gigabit WAN

Designed with 5G NR and Gigabit Ethernet WAN interfaces, the ICG-2515-NR ensures Internet connectivity by featuring failover functionality between 5G NR and GbE WAN. The ICG-2515-NR provides flexibility to set priority for 5G NR or GbE WAN connection. When the main WAN interface fails, the secondary WAN interface will automatically back up the connection to ensure always-on connectivity.

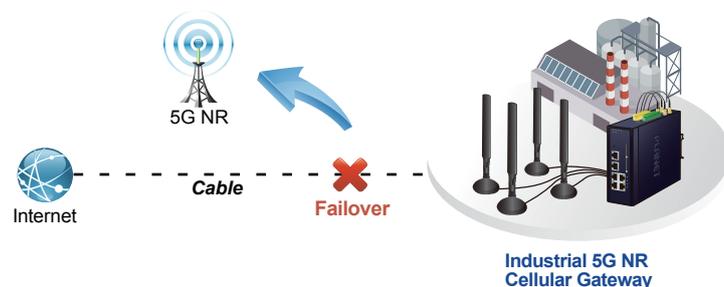

## Highlights

- Global 5G NR (NSA/SA)/4G LTE network with dual SIM design for cellular network redundancy
- Automatic failover between 5G NR and Gigabit WAN
- 2 x DI/DO and 1 serial port (RS485) for Modbus applications
- SSL VPN and robust hybrid VPN (IPSec/PPTP/L2TP over IPSec)
- Stateful packet inspection (SPI) firewall and content filtering
- Blocks DoS/DDOS attack, port range forwarding
- High Availability, AP Controller, Captive Portal and RADIUS
- Planet NMS controller system and CloudViewer app supported
- -45 to 75 degrees C operating temperature; DIN-rail and fanless designs

## Hardware

- 4 x 10/100/1000BASE-T RJ45 LAN ports, auto-negotiation, auto MDI/MDI-X
- 1 x 10/100/1000BASE-T RJ45 WAN port, auto-negotiation, auto MDI/MDI-X
- 4 x 5G NR antennas
- 2 x SIM card slots
- 1 x serial console port (RS485)
- 1 x reset button

## Cellular Interface

- Supports multi-band connectivity with 5G NR (NSA/SA), LTE-FDD, LTE-TDD, and WCDMA
- Built-in SIM and broadband backup for network redundancy
- Four detachable antennas for 5G NR connection
- LED indicators for signal strength and connection status

## IP Routing Feature

- Static Route
- Dynamic Route
- OSPF

## Firewall Security

- Cybersecurity
- Stateful Packet Inspection (SPI) firewall
- Blocks DoS/DDoS attack
- Content Filtering

**Ultra-Fast Speed 4G/5G Network\***

The ICG-2515-NR supports 5G NR DL speeds higher than 2.4 Gbps and 4G LTE DL speeds of up to 1 Gbps. The wide spectrum bandwidth accelerates internet speeds and reduces network latency for premium and time-sensitive connectivity services. The ICG-2515-NR also supports multi-band connectivity including LTE FDD/TDD and WCDMA for a wide range of applications.

\*The real 5G NR/4G LTE data rate is dependent on local service provider.

Up to download speed **2.4 Gbps**



**Dual SIM Design**

To enhance reliability, the ICG-2515-NR is equipped with dual SIM slots that support failover and roaming over to ensure uninterrupted connectivity for mission-critical cellular communications. Besides, the ICG-2515-NR supports load balance function to improve network efficiency. It provides a more flexible and easier way for users to create an instant network sharing service via 5G-NR in public places like transportations, outdoor events, etc.



**Dual 5G NR**

**GPS Included**

The ICG-2515-NR is equipped with (global positioning system) feature. It adapts 5G-NR technology to incorporate multiple global navigation systems (GPS/GLONASS/BeiDou/Galileo/QZSS). It helps to position location of cellular gateway based on a network of satellites that continuously transmits necessary data. More signals transmitted from more satellites can triangulate its location on the ground, meaning any location can be easily tracked.

**GNSS Positioning**



- MAC Filtering and IP Filtering
- NAT ALGs (Application Layer Gateway)
- Blocks SYN/ICMP Flooding

**VPN Features**

- IPSec/Remote Server (Net-to-Net, Host-to-Net), GRE, PPTP Server, L2TP Server, SSL Server/Client (Open VPN)
- Max. Connection Tunnel Entries: 60 VPN tunnels,
- Encryption methods: DES, 3DES, AES, AES-128/192/256
- Authentication methods: MD5, SHA-1, SHA-256, SHA-384, SHA-512

**Networking**


- Outbound load balancing
- Failover for dual-WAN
- High Availability
- Captive Portal
- RADIUS Server/Client
- Static IP/PPPoE/DHCP client for WAN
- DHCP server/NTP client for LAN
- Protocols: TCP/IP, UDP, ARP, IPv4, IPv6
- Port forwarding, QoS, DMZ, IGMP, UPnP, SNMPv1,v2c, v3
- MAC address clone
- DDNS: PLANET DDNS, Easy DDNS, DynDNS and No-IP

**Others**

- Setup wizard
- Dashboard for real-time system overview
- Supported access by HTTP or HTTPS
- Auto reboot
- PLANET NMS System and Smart Discovery Utility for deployment management
- Planet CloudViewer App for real-time monitoring

### Ideal High-Availability VPN Security Router Solution for Industrial Environment

The ICG-2515-NR provides complete data security and privacy for accessing and exchanging the most sensitive data, built-in IPSec VPN function with DES/3DES/AES encryption and MD5/SHA-1/SHA-256/SHA-384/SHA-512 authentication, and GRE, SSL, PPTP and L2TP server mechanism. The full VPN capability in the ICG-2515-NR makes the connection secure, more flexible, and more capable.

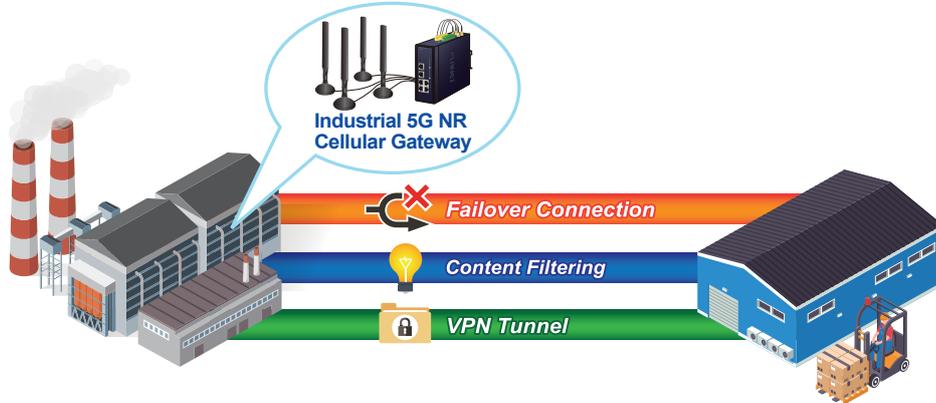

### Wi-Fi Deployments and Authentication with Simplified Management


The ICG-2515-NR also provides a built-in AP Controller, Captive Portal, RADIUS and a DHCP server to facilitate small and medium businesses to deploy secure employee and guest access services without any additional server. The ICG-2515-NR can offer a secure Wi-Fi network with easy installation for your business.

## Captive Portal




### Centralized Remote Control of Managed APs

The ICG-2515-NR provides centralized management of PLANET Smart AP series via a user-friendly Web GUI. It's easy to configure AP for the wireless SSID, radio band and security settings. With a four-step configuration process, wireless profiles for different purposes can be simultaneously delivered to multiple APs or AP groups to minimize deployment time, effort and cost.

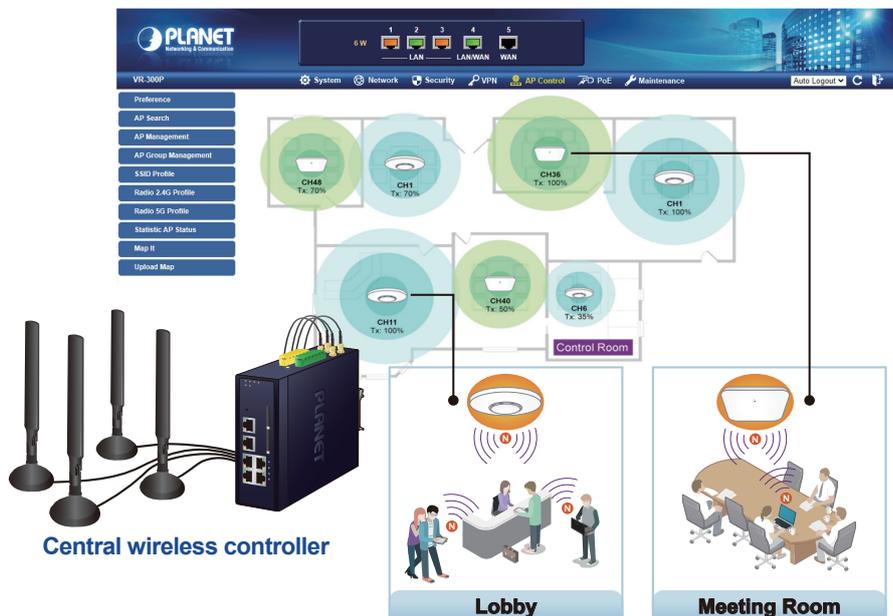


For example, to configure multiple Smart APs of the same model, the ICG-2515-NR allows clustering them to a managed group for unified management. According to requirements, wireless APs can be flexibly expanded or removed from a wireless AP group at any time. The AP cluster benefits bulk provision and bulk firmware upgrade through single entry point instead of having to configure settings in each of them separately.

## Simplified Cluster Management with 4 Steps

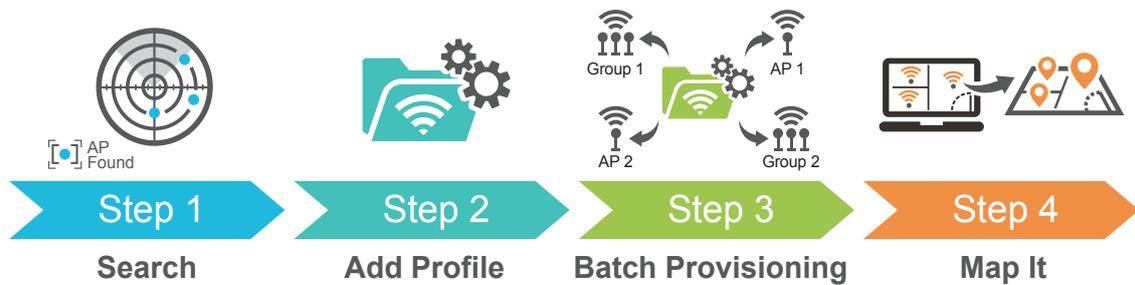

### Excellent Ability in Threat Defense

The ICG-2515-NR has built-in SPI (stateful packet inspection) firewall and DoS/DDoS attack mitigation functions to provide high efficiency and extensive protection for your network. Thus, virtual server and DMZ functions can let you set up servers in the Intranet and still provide services to the Internet users.

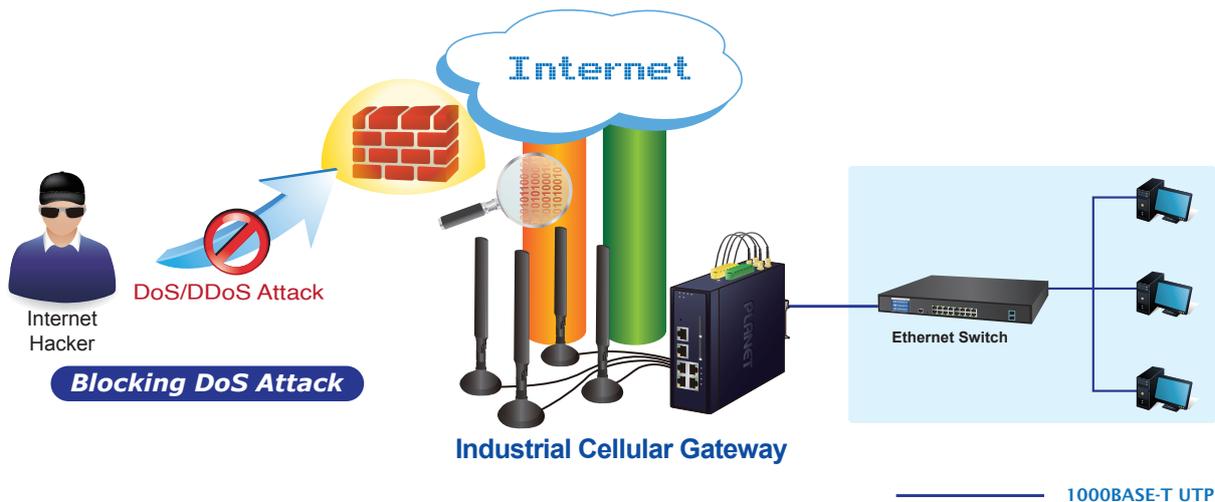



### Cybersecurity Network Solution to Minimize Security Risks

The cybersecurity feature included to protect the switch management in a mission-critical network virtually needs no effort and cost to install. For efficient management, the ICG-2515-NR is equipped with HTTPS web and SNMP management interfaces. With the built-in web-based management interface, the ICG-2515-NR offers an easy-to-use, platform independent management and configuration facility. The ICG-2515-NR supports SNMP and it can be managed via any management software based on the standard SNMP protocol.

## Applications

### 5G NR Cellular Communication Solution

PLANET ICG-2515-NR adopts 5G NR cellular technology and thus breaks the 100m limitation of RJ45 transmission. To avoid data loss affected by an unexpected breakdown connection on the part of ISP, the ICG-2515-NR provides dual SIM card slots, failover, load balance functions and advanced features like VLAN, VPN, Modbus, and network management to cover more applications.

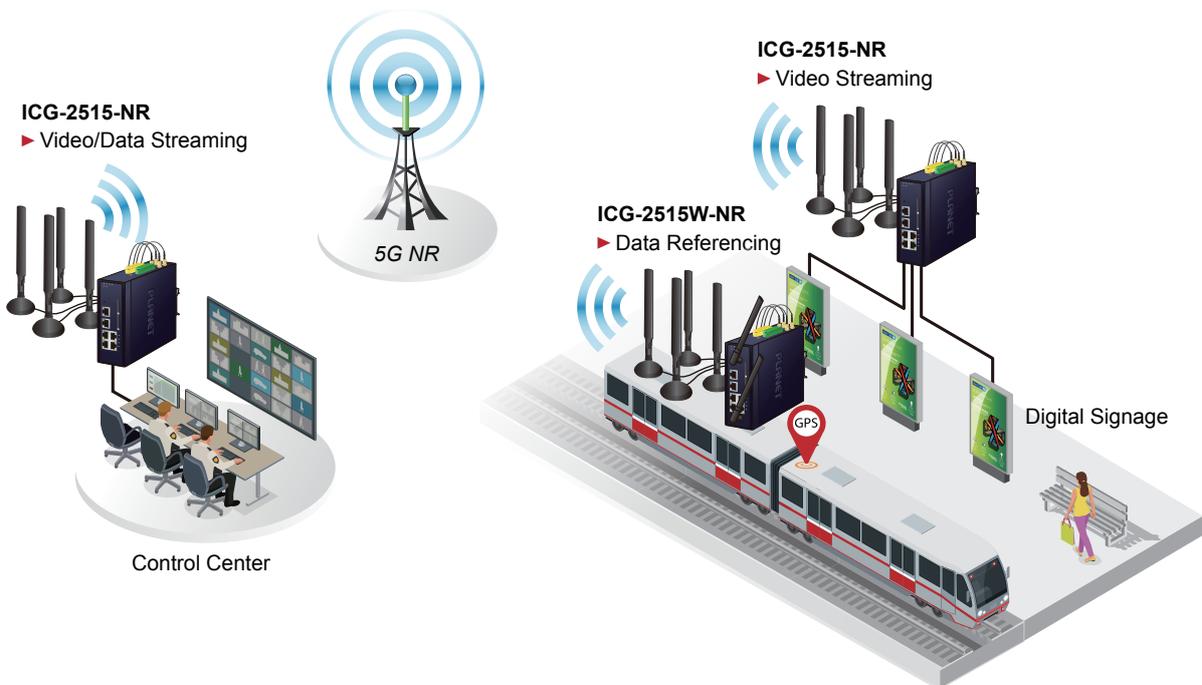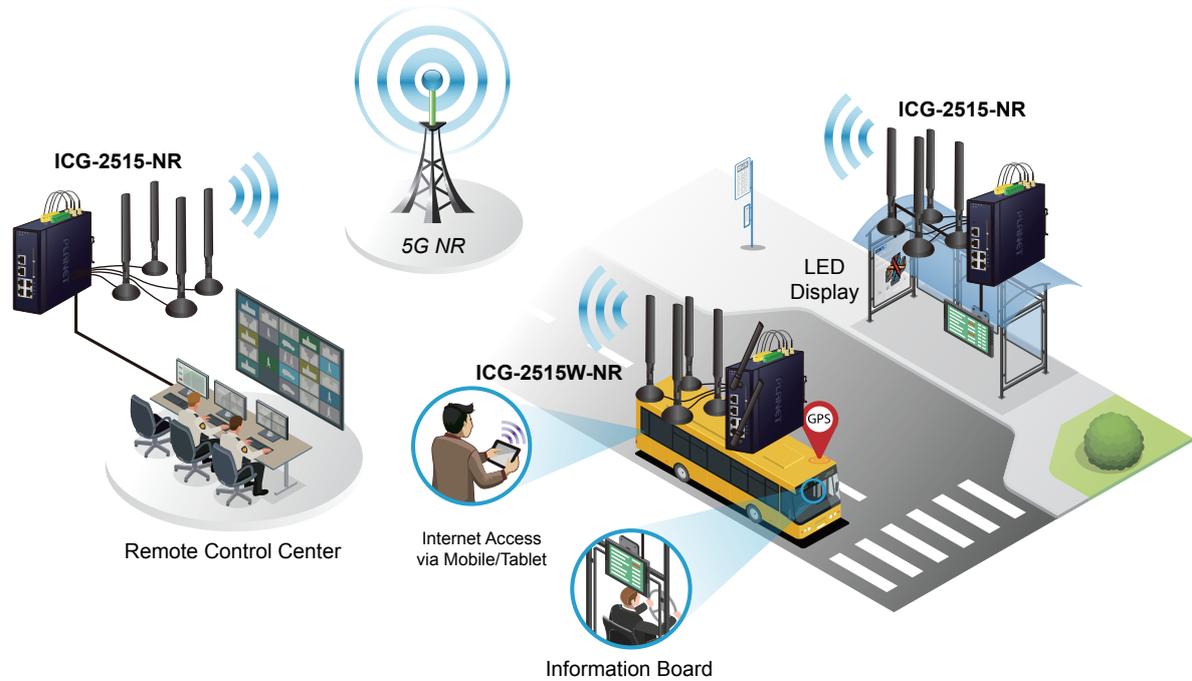


## Specifications

Product	ICG-2515-NR
<b>Hardware Specifications</b>	
Copper Ports	5 10/100/1000BASE-T RJ45 Ethernet ports including 3 LAN ports (Ports 1 to 3) 1 LAN/WAN port (Port 4) 1 WAN port (Port 5)
Serial Interface	RJ45 serial port
SIM Interface	2 SIM card slots with mini SIM card tray
Cellular Antenna	5 dBi external antennas with SMA connectors for 5G-NR
DI & DO Interfaces	<b>2 Digital Input (DI):</b> Level 0: -24V~2.1V (±0.1V) Level 1: 2.1V~24V (±0.1V) Input Load to 24V DC, 10mA max. <b>2 Digital Output (DO):</b> Open collector to 24V DC, 100mA max.
Connector	Removable 6-pin terminal block for power input Pin 1/2 for Power 1, Pin 3/4 for fault alarm, Pin 5/6 for Power 2
Reset Button	< 5 sec: System reboot > 5 sec: Factory default
Enclosure	IP30 metal case
Installation	DIN rail, desktop, wall-mounting
LED Indicators	<b>System:</b> P1 (Green) P2 (Green) Alarm (Red) I/O (Red) <b>Ethernet Interfaces (Port1-4 and WAN Port):</b> 1000 LNK/ACT (Green) 10/100 LNK/ACT (Amber) <b>Cellular SIM:</b> SIM1 and SIM2 (Green) <b>Cellular signal:</b> 4 levels (Green)
Dimensions (W x D x H)	50 x 135 x 135 mm
Weight	0.8 kg
Power Requirements – DC	9~54V DC, 0.5A
Power Consumption	7 W / 23.9 BTU
<b>Multi Band Supports</b>	
5G NR	n1/n2/n3/n5/n7/n8/n12/n20/n25/n28/n38/n40/n41/n48/n66/n71/n77/n78/n79
LTE-FDD	B1/B2/B3/B4/B5/B7/B8/B12/B13/B14/B17/B18/B19/B20/B25/B26/B28/B29/B30/B32/B46/B66/B71
LTE TDD	B34/B38/B39/B40/B41/B42/B43/B48
WCDMA	B1/B2/B3/B4/B5/B8
GNSS	GPS L1+L5 dual bands/GLONASS/BeiDou/Galileo/QZSS
Data Transmission Throughput	2.4Gbps (DL)/500Mbps (UL) for NR 1Gbps (DL)/200Mbps (UL) for LTE 42Mbps (DL)/5.76Mbps (UL) for HSPA+
<b>Advanced Functions</b>	
VPN	<ul style="list-style-type: none"> <li>■ IPSec/Remote Server (Net-to-Net, Host-to-Net)</li> <li>■ GRE</li> <li>■ PPTP Server</li> <li>■ L2TP Server</li> <li>■ SSL Server/Client (Open VPN)</li> </ul>
VPN Tunnels	Max. 60
VPN Throughput	Max. 60Mbps
Encryption Methods	DES, 3DES, AES or AES-128/192/256 encrypting
Authentication Methods	MD5/SHA-1/SHA-256/SHA-384/SHA-512 authentication algorithm
<b>Management</b>	
Basic Management Interfaces	Web browser SNMP v1, v2c PLANET Smart Discovery utility/UNI-NMS supported
Secure Management Interfaces	SSHv2, TLSv1.2, SNMP v3
System Log	System Event Log

Others	Setup wizard
	Dashboard
	System status/service
	Statistics
	Connection status
	Auto reboot
	Diagnostics
<b>Standards Conformance</b>	
Regulatory Compliance	CE, FCC
<b>Environment</b>	
Operating	Temperature: -40 ~ 75 degrees C Relative humidity: 5 ~ 90% (non-condensing)
Storage	Temperature: -40 ~ 85 degrees C Relative humidity: 5 ~ 90% (non-condensing)

## Dimensions

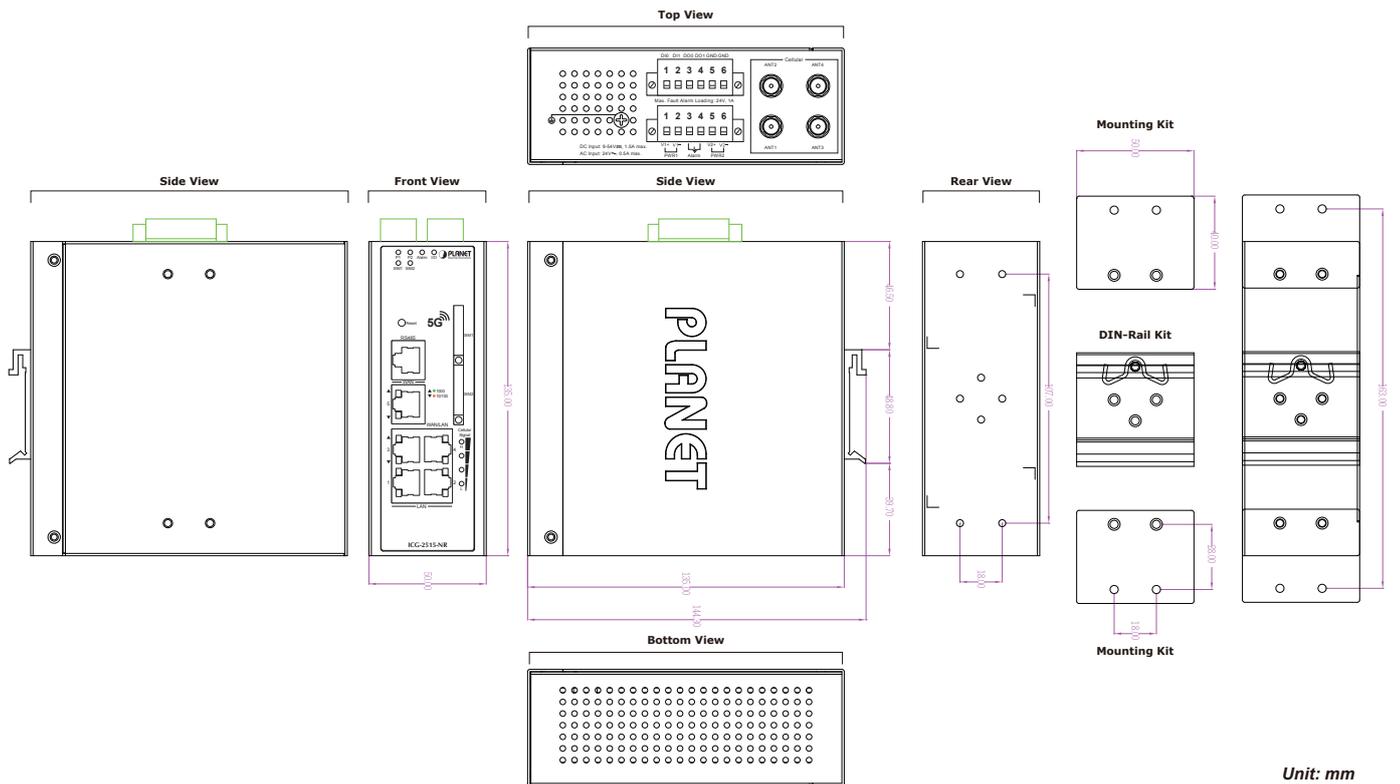

## Ordering Information

ICG-2515-NR

Industrial 5G NR Cellular Gateway with 5-Port 10/100/1000T

## Related Product

IVR-100	Industrial 5-Port 10/100/1000T VPN Security Gateway
ICG-2510WG-LTE	Industrial 4G LTE Cellular Wireless Gateway with 5-Port 10/100/1000T
VCG-1500WG-LTE	Vehicle 4G LTE Cellular Wireless Gateway with 5-Port 10/100TX
WGR-500-4PV	Industrial Wall-mount Gigabit Router with 4-Port 802.3at PoE+ and LCD Touch Screen
WGR-500-4P	Industrial Wall-mount Gigabit Router with 4-Port 802.3at PoE+
WGR-500	Industrial 5-Port 10/100/1000T Wall-mount Gigabit Router

### PLANET Technology Corporation

11F., No.96, Minquan Rd., Xindian Dist., New Taipei City 231,  
Taiwan (R.O.C.)

Tel: 886-2-2219-9518

Email: [sales@planet.com.tw](mailto:sales@planet.com.tw)

Fax: 886-2-2219-9528

[www.planet.com.tw](http://www.planet.com.tw)



PLANET reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. Copyright © 2021 PLANET Technology Corp. All rights reserved.

**ICG-2515-NR**