

Industrial L3 24-Port 10/100/1000T 802.3bt PoE + 4-Port 10G SFP+ Managed Ethernet Switch



Advanced Layer 3 Manageable PoE++ Solution for Harsh Environments

PLANET IGS-6325-24UP4X L3 Industrial Managed PoE++ Switch is a high-performance networking solution that provides **24 10/100/1000BASE-T 802.3bt PoE++ ports**. Each port can deliver **up to 95 watts of power**. In addition, the switch has **4 10G SFP+ ports**, all housed in a **19-inch 1U rack-mount case**. With its 10Gbps uplink, this switch can handle extremely large amounts of data in a secure topology, linking to an industrial backbone or high-capacity servers.

The IGS-6325-24UP4X also has user-friendly yet advanced IPv6/IPv4 management interfaces, abundant L2/L4 switching functions, **Layer 3 OSPFv2, v3 & RIPv2 dynamic routing** capability, and advanced **ITU-G.8032 ERPS Ring** technology to improve the rapid self-recovery capability. Furthermore, PLANET intelligent PoE functions enable controlling the PoE IP surveillance and wireless network applications. The switch is designed to operate reliably, stably, and quietly within a temperature range of **-40 to 75 degrees Celsius**.



High Power and Full-speed Data Delivered over 4-pair UTP Cabling

The IGS-6325-24UP4X meets the standards of IEEE 802.3bt PoE++ technology and has a total power capacity of 1440 watts. This allows it to supply up to 95 watts of power to each remote PoE-compliant powered device (PD) using all four pairs of standard Cat5e/6 Ethernet cabling, ensuring high power and full-speed data delivery. Compared to the conventional 802.3at PoE+, it offers triple power capacity, making it the perfect solution for higher power consuming PDs, including:


- PoE PTZ speed dome cameras
- Network devices
- Thin clients
- AIO (all-in-one) touch PCs, point of sale (POS) and information kiosks
- Remote digital signage displays
- PoE lightings

Physical Port

- **24 10/100/1000BASE-T** Gigabit Ethernet RJ45 ports with **IEEE 802.3bt PoE++** Injector function
- **4 10GBASE-SR/LR SFP+** slots, backward compatible with **1G/2.5GBASE-X SFP**
- One RJ45-to-RS232 console interface for basic management and setup

IEEE 802.3bt Power over Ethernet

- Compliance with IEEE 802.3bt Type-4 PoE++ standard
- Backward compatibility with IEEE 802.3af/at PD device
- Power up to **24 IEEE 802.3bt PoE++** devices (60W) using dual power input
- Each port has a maximum power output of 95 watts (Using the maximum amount may reduce the number of available ports.)
- Total of 1440-watt PoE budget
 - A single power input can provide a power budget of up to 720W.
 - Two power inputs can provide a power budget of up to 1,440W.
- Detects powered devices (PD) automatically.
- Circuit protection prevents power interference between ports.
- Power feeding up to 100m
- PoE management features
 - Total PoE power budget control
 - Per port PoE function enable/disable
 - PoE admin-mode control
 - PoE port power feeding priority
 - Per PoE port power limit
 - PD classification detection
 - PoE extension mode to support power feeding up to a maximum distance of 250 meters.
- Note: The transmission data rate and quality will depend on the PD devices.
- Intelligent PoE features
 - Temperature threshold setting
 - PoE usage threshold setting

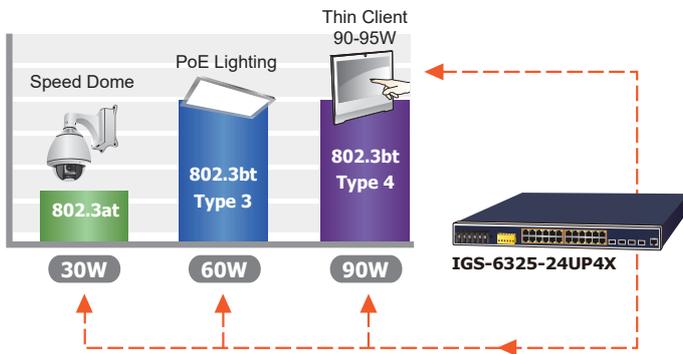

802.3bt PoE++ and Advanced PoE Power Output Mode Management

To meet the demand for supplying stable PoE power to various powered devices, the IGS-6325-24UP4X switch offers five different PoE power output modes for selection.

- 90W 802.3bt PoE++ Power Output Mode
- 95W UPOE Power Output Mode
- 95W Force Power Output Mode
- 36W End-span PoE Power Output Mode
- 36W Mid-span PoE Power Output Mode

ONVIF Support Allows Effective and Centralized Control Over IP-based Security Products

The IGS-6325-24UP4X switch offers ONVIF support as part of its versatile feature set for seamless integration with IP surveillance cameras. Through the switch's web GUI, users can easily search for and display all ONVIF-compliant devices on their LAN.

Users can also upload floor plans to the switch and place IP surveillance cameras on the plan for more intuitive planning and faster inspection in the future. Additionally, the web GUI provides real-time surveillance information, online/offline status, and the ability to remotely reboot cameras.



Intelligent Alive Check for Powered Devices

The IGS-6325-24UP4X can be configured to monitor the status of connected powered devices (PDs) in real time through ping action. If a PD stops working and responding, the IGS-6325-24UP4X will recycle the PoE port power and bring the PD back to working condition. This greatly enhances reliability, as the assigned PoE port automatically reboots the PD, reducing the administrator's management burden.

- PD alive check
- PoE schedule

Industrial Protocol

- Modbus TCP for real-time monitoring in the SCADA system
- Supports IEEE 1588v2 PTP (Precision Time Protocol) transparent clock mode.

Industrial Design and Installation

- The IP30 metal housing is designed to be rack-mountable in a 19-inch rack.
- The front-accessible and fan-less design enables convenient access and quiet operation.
- Dual 48~54V DC power input with reverse polarity protection
- -40 to 75 degrees C operating temperature

Digital Input and Digital Output

- 2 digital inputs (DI)
- 2 digital outputs (DO)
- Integrate sensors into auto alarm system
- Transfer alarms to IP networks via email and SNMP trap


Layer 3 IP Routing Features

- IPv4 dynamic routing protocol supports RIPv1/v2 and OSPFv2
- IPv6 dynamic routing protocol supports OSPFv3.
- IPv4/IPv6 hardware static routing
- Routing interface provides per VLAN routing mode

Layer 2 Features

- High performance of Store-and-Forward architecture, and runt/CRC filtering eliminates erroneous packets to optimize the network bandwidth
- Storm Control support
 - Broadcast/Multicast/Unicast
- Supports **VLAN**
 - IEEE 802.1Q tagged VLAN
 - Provider Bridging (VLAN Q-in-Q/IEEE 802.1ad)
 - Private VLAN Edge (PVE)
 - Protocol-based VLAN


PD Alive Check

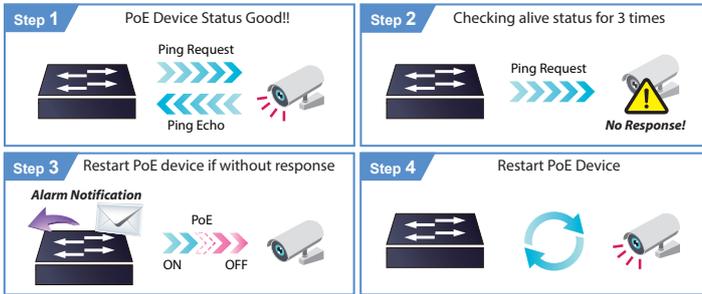

PoE Scheduling to Save Energy

By implementing the "PoE schedule" function, businesses can reduce their energy consumption during non-business hours or periods of low network usage. This not only helps to reduce energy costs but also minimizes the overall carbon footprint of the organization.

Furthermore, the IGS-6325-24UP4X's PoE scheduling feature provides a convenient and easy-to-use interface for managing power usage. The user can easily set the time intervals for each PoE port, allowing for more efficient power management.

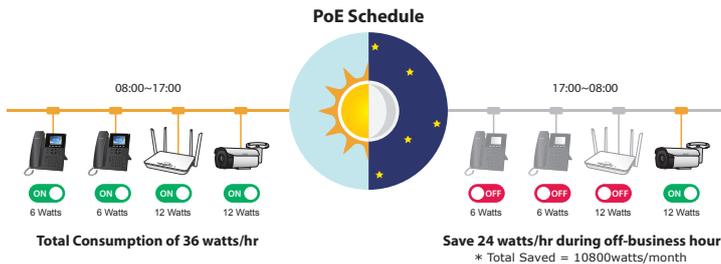

Scheduled Power Recycling

The IGS-6325-24UP4X enables connected PoE IP cameras or PoE wireless access points to reboot at a specific time each week. This will reduce the chance of IP camera or AP crashes resulting from buffer overflow.



Layer 3 Routing Support

The IGS-6325-24UP4X allows administrators to boost network efficiency by configuring Layer 3 IPv4/IPv6 VLAN static routing manually or automatically through the **Routing Information Protocol (RIP)** or **Open Shortest Path First (OSPF)** settings.

- MAC-based VLAN
- Voice VLAN
- GVRP (GARP VLAN Registration Protocol)
- Supports Spanning Tree Protocol
 - IEEE 802.1D Spanning Tree Protocol (STP)
 - IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)
 - IEEE 802.1s Multiple Spanning Tree Protocol (MSTP), spanning tree by VLAN
- BPDU Guard
- Supports **Link Aggregation**
 - IEEE 802.3ad Link Aggregation Control Protocol (LACP)
 - Cisco ether-channel (static trunk)
 - Maximum 14 trunk groups with 16 ports per trunk group
 - Up to 104Gbps bandwidth (duplex mode)
- Supports port mirroring for many-to-one connections.
- Port mirroring to monitor the incoming or outgoing traffic on a particular port
- Loop protection to avoid broadcast loops
- Link Layer Discovery Protocol (LLDP)
- Supports ITU G.8032 ERPS Ring (Ethernet Ring Protection Switching).
- Compatible with Cisco's uni-directional link detection (UDLD), which monitors a link between two switches and blocks the ports on both ends of the link if the link fails at any point between the two devices.

Quality of Service

- Ingress shaper and egress rate limit per port bandwidth control
- 8 priority queues on all switch ports
- Traffic classification
 - IEEE 802.1p CoS
 - ToS/DSCP/IP Precedence of IPv4/IPv6 packets
 - IP TCP/UDP port number
 - Typical network application
- Strict priority and Weighted Round Robin (WRR) CoS policies
- Supports QoS and In/Out bandwidth control on each port
- Traffic-policing on the switch port
- DSCP remarking

The **RIP** uses hop count as a routing metric and prevents routing loops by setting a limit on the number of hops allowed in a path from source to destination.

The **OSPF** is an interior dynamic routing protocol for autonomous systems based on link state. The protocol creates a database of link states by exchanging link states among Layer 3 switches and then uses the Shortest Path First algorithm to generate a route table based on that database.

Reliable 10Gb Ethernet Solution

The emergence of 10G Ethernet marks a significant advancement in Ethernet technology. The IGS-6325-24UP4X is a powerful networking device that offers **four 10G SFP+ slots** capable of supporting three different speeds. These slots can operate at **10GBASE-SR/LR or 1G/2.5GBASE-SX/LX backwards**, providing administrators with flexibility in choosing the most suitable SFP/SFP+ transceiver based on the required transmission distance and speed. With ample bandwidth and robust processing capacity, the IGS-6325-24UP4X provides an efficient solution for administrators seeking to enhance their network infrastructure.


Cybersecurity Network Solution to Minimize Security Risks

The IGS-6325-24UP4X supports **SSHv2 and TLSv1.2** protocols to provide strong protection against advanced threats. It includes a range of cybersecurity features such as **DHCP Snooping, IP Source Guard, ARP Inspection Protection, 802.1x port-based, and MAC-based network access control, RADIUS and TACACS+ user accounts management, SNMPv3 authentication**, and more to provide a comprehensive security solution.



Redundant Ring, Fast Recovery for Critical Network Applications

The IGS-6325-24UP4X Series supports redundant ring technology and features strong, rapid self-recovery capability to prevent interruptions and external intrusions. It incorporates advanced **ITU-T G.8032 ERPS (Ethernet Ring Protection Switching)** technology, Spanning Tree Protocol (802.1s MSTP), and **dual power** input system into customer's industrial automation network to enhance system reliability and uptime in harsh factory environments. In a simple Ring network, the recovery time of data link can be as fast as **10ms**.

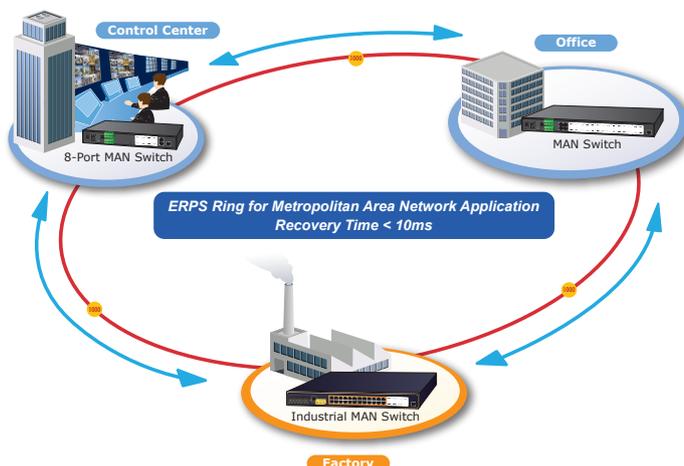

- Voice VLAN

Multicast

- Supports IPv4 IGMP snooping v1, v2 and v3
- Supports IPv6 MLD snooping v1 and v2
- Querier mode support
- IPv4 IGMP snooping port filtering
- IPv6 MLD snooping port filtering
- MVR (Multicast VLAN Registration)

Security

- Authentication
 - IEEE 802.1x port-based / MAC-based network access authentication
 - IEEE 802.1x authentication with guest VLAN
 - Guest VLAN assigns clients to a restricted VLAN with limited services.
 - Built-in RADIUS client to co-operate with the RADIUS servers
 - TACACS+ login users access authentication
 - RADIUS/TACACS+ users access authentication
- Access Control List
 - IP-based Access Control List (ACL)
 - MAC-based Access Control List
- Source MAC/IP address binding
- **DHCP Snooping** to filter un-trusted DHCP messages
- **Dynamic ARP Inspection** discards ARP packets with invalid MAC address to IP address binding
- **IP Source Guard** prevents IP spoofing attacks
- IP address access management to prevent unauthorized intruder

Management

- IPv4 and IPv6 dual stack management
- Switch Management Interfaces
 - Console/ and elnet Command Line Interface
 - HTTP/HTTPs Web switch management
 - SNMP v1 and v2c switch management
 - SSHv2, TLSv1.2 and SNMP v3 secure access

Effective Alarm Alert for Better Protection

The IGS-6325-24UP4X supports a Fault Alarm feature that can alert users when there is an issue with the switches. This feature saves time and resources by quickly identifying the problem, eliminating the need for laborious troubleshooting efforts.

Fault Alarm Feature



Digital Input and Digital Output for External Alarm

The IGS-6325-24UP4X supports digital input and output on its front panel. These features allow users to detect and log the status of external devices, such as door intrusion detectors, using digital input. It also enables the sending of an event alarm to administrators. Digital output can be used to alert administrators when the IGS-6325-24UP4X experiences a link down, link up, or power failure.

Digital Input




Digital Output



- SNMP Management
 - Four RMON groups (history, statistics, alarms, and events)
 - SNMP trap for interface Link Up and Link Down notification
- IPv6 IP address/NTP/DNS management
- Built-in Trivial File Transfer Protocol (TFTP) client
- BOOTP and DHCP for IP address assignment
- System Maintenance
 - Firmware upload/download via HTTP/TFTP
 - Reset button for system reboot or reset to factory default
 - Dual Images
- DHCP Functions:
 - DHCP Relay
 - DHCP Option82
 - DHCP Server
- User Privilege levels control
- Network Time Protocol (NTP)
- Network Diagnostic
 - SFP-DDM (Digital Diagnostic Monitor)
 - ICMPv6/ICMPv4 Remote Ping
 - Cable diagnostic technology provides the mechanism to detect and report potential cabling issues
- SMTP/Syslog remote alarm
- System Log
- PLANET Smart Discovery Utility for deployment management
- PLANET UNI-NMS (Universal Network Management) and CloudViewer app for deployment management

Robust Layer 2 Features

The IGS-6325-24UP4X is capable of advanced Layer 2 switch management functions, including dynamic port **link aggregation**, **802.1Q tagged VLAN**, **Q-in-Q VLAN**, **private VLAN**, **Multiple Spanning Tree Protocol (MSTP)**, **Layer 2 to Layer 4 QoS**, **bandwidth control**, **IGMP snooping**, and **MLD snooping**. By aggregating supporting ports, the IGS-6325-24UP4X can operate up to 14 high-speed trunk groups with up to 16 ports, with fail-over support.

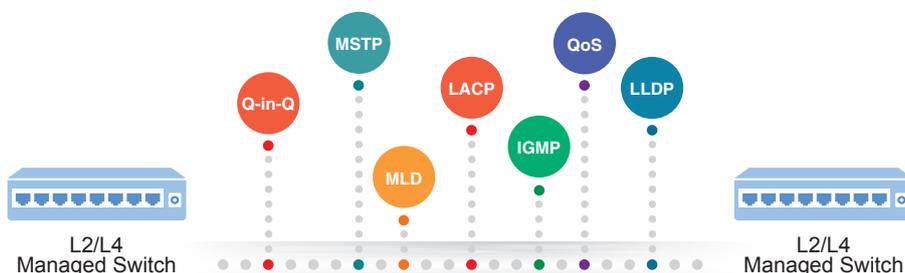


Modbus TCP Provides Flexible Network Connectivity for Factory Automation

With the supported **Modbus TCP/IP** protocol, the IGS-6325-24UP4X can easily integrate with **SCADA** systems, **HMI** systems and other data acquisition systems in factory floors. It enables administrators to remotely monitor the industrial Ethernet switch's **operating information, port information and communication status**, thus easily achieving enhanced monitoring and maintenance of the entire factory.

1588 Time Protocol for Industrial Computing Networks

The IGS-6325-24UP4X is ideal for implementing Precision Time Protocol (PTP) applications as a transparent clock. It can play an important role in an **IEEE 1588** and Synchronous Ethernet network by supporting **MEF service** delivery and timing over packet solutions.


Time Synchronization in Network

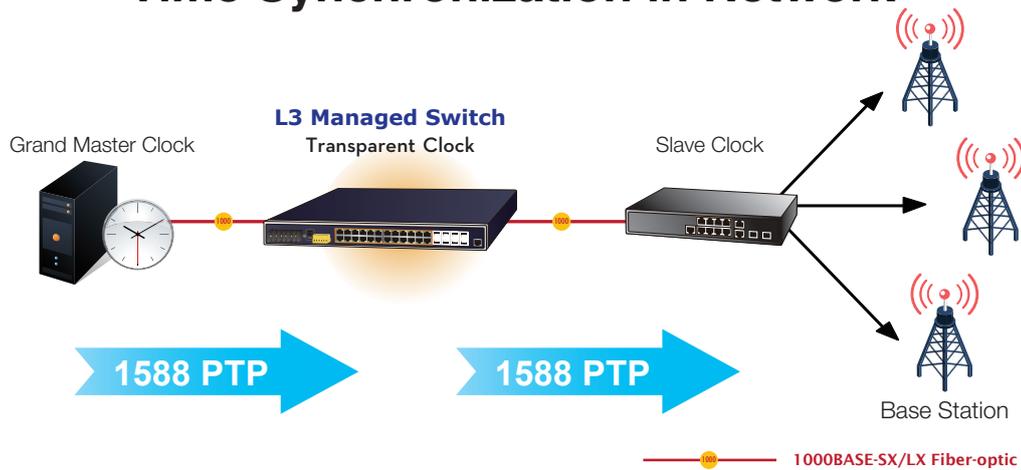

Applications

Industrial Area Department/Workgroup PoE Switch

The IGS-6325-24UP4X offers up to 24 in-line power interfaces for PoE++, enabling the creation of a centrally controlled power system for IP phones, IP surveillance cameras, wireless AP groups, or a large number of access control systems for security purposes in industrial networks. With no limitations on power sockets, the IGS-6325-24UP4X simplifies the installation process for IP cameras or wireless APs, making it more efficient.

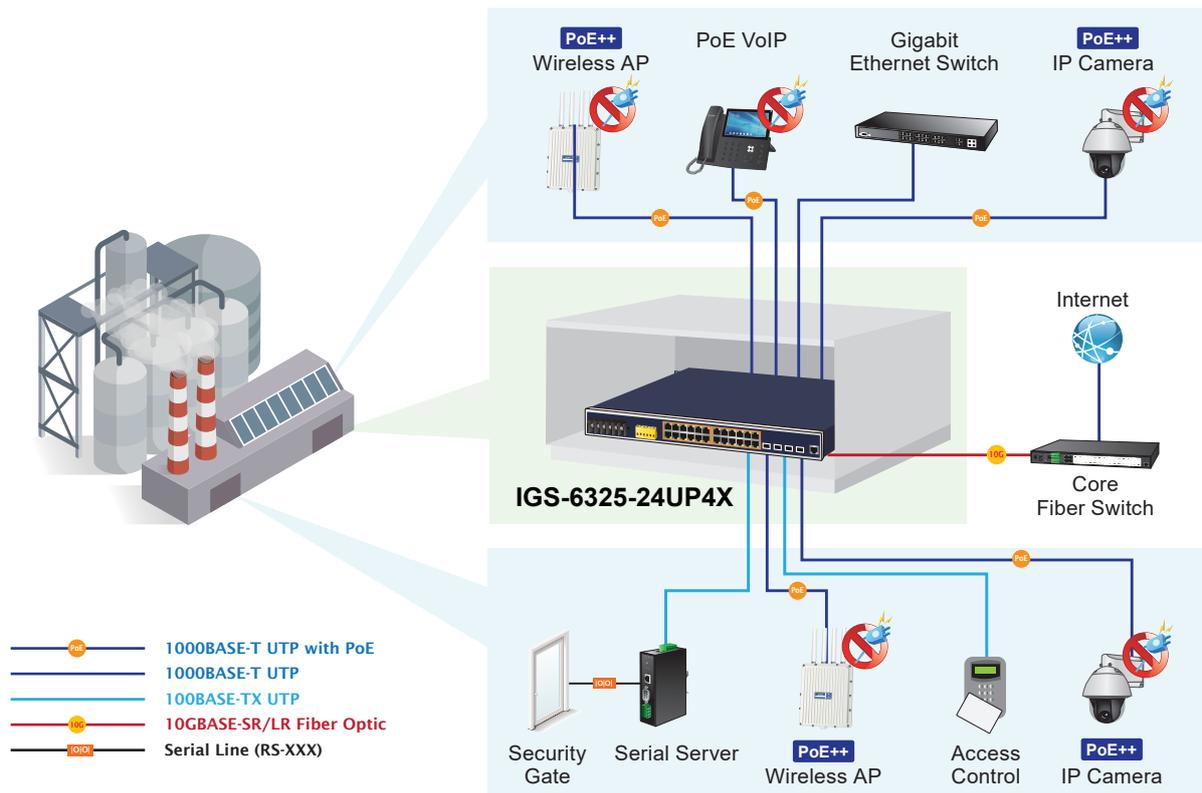

Specifications


PoE Power Output	IGS-6325-24UP4X
Hardware Specifications	
Copper Ports	24 10/100/1000BASE-T RJ45 auto-MDI/MDI-X ports
SFP+ Slots	4 10GBASE-SR/LR SFP+ interfaces (Port-25 to Port-28) Backward compatible with 1G/2.5GBASE-SX/LX/BX SFP transceivers
PoE Injector Port	24 ports with 802.3bt PoE++ injector function from Port-1 to Port-24
Console	1 x RJ45-to-RS232 serial port (115200, 8, N, 1)
Reset Button	< 5 sec: System reboot > 5 sec: Factory default
ESD Protection	Contact 4KVDC; Air 8KVDC
Connector	6-contact barrier terminal block for power input Contact 1/2 for Power 1, Contact 3/4 for fault alarm, Contact 5/6 for Power 2 Removable 6-pin terminal block for DI/DO interface Pin 1/2 for DI 0 & 1, Pin 3/4 for DO 0 & 1, Pin 5/6 for GND
Alarm	One relay output for power failure. Alarm relay current carry ability: 3A @ 24V DC
Digital Input (DI)	2 digital input (DI): Level 0: -24V~2.1V ($\pm 0.1V$) Level 1: 2.1V~24V ($\pm 0.1V$) Input load to 24VDC, 10mA max.
Digital Output (DO)	2 digital output (DO): Open collector to 24V DC, 100mA max.
Enclosure	IP30 metal case
Installation	Rack-mount kit
SDRAM	512Mbytes
Flash Memory	64Mbytes
Dimensions (W x D x H)	440 x 300 x 44 mm, 1U height
Weight	4,051g
Power Requirements	Dual 48~54V DC, 32A max.
Power Consumption	52VDC Input: No Loading: 20.74W/70.8BTU/hr; Full Loading: 1,522W/5,262.9BTU/hr 54VDC Input: No Loading: 20.78W/70.9BTU/hr; Full Loading: 1,522W/5,193.3BTU/hr
LED Indicators	System: DC 1 (Green) DC 2 (Green) Alarm (Red) Ring (Green) Ring Owner (Green) DIDO (Red) 10/100/1000T RJ45 PoE++ Interfaces (Port 1 to Port 24): bt PoE++ (Green) af/at PoE (Amber) 1000 LNK/ACT (Green) 100 LNK/ACT (Amber) 1G/2.5G/10Gbps Fiber Interfaces (Port 25 to Port 28): 1G/2.5Gbps LNK/ACT (Green) 10Gbps LNK/ACT (Amber)
Switching Specifications	
Switch Architecture	Store-and-Forward
Switch Fabric	128Gbps/non-blocking
Throughput (packet per second)	95.2Mpps@ 64 bytes packet
Address Table	16K entries, automatic source address learning and aging
Shared Data Buffer	32M bits
Flow Control	IEEE 802.3x pause frame for full duplex Back pressure for half duplex
Jumbo Frame	10K bytes
Power Over Ethernet	
PoE Standard	IEEE 802.3bt PoE++ Type-4
PoE Power Supply Type	End-span Mid-span BT

PoE Power Output	Per port 48V ~ 54VDC - 802.3bt Type-4 mode: maximum 95 watts - 802.3bt Type-3 mode: maximum 60 watts - End-span mode: maximum 36 watts - Mid-span mode: maximum 36 watts - Force mode: maximum 95 watts
Power Pin Assignment	802.3bt/UPoE: 1/2(-), 3/6(+), 4/5(+), 7/8(-) 802.3at PoE: End-span: 1/2(-), 3/6(+) 802.3at PoE: Mid-span: 4/5(+), 7/8(-)
PoE Power Budget	Single power input: 720W maximum (depending on power input) Dual power input: 1,440W maximum (depending on power input) Note: The DC voltage of the dual power input must match, such as dual 54V.
Number of 90W 802.3bt Type-4 PDs	16
Number of 60W 802.3bt Type-3 PDs	24
Number of 30W 802.3at Type-2 PDs	24
PoE Management Functions	
Enhanced PoE Mode	Standard/Legacy/Force
PoE Management	PD Alive Check Scheduled Power Recycling PoE Schedule PoE Usage Monitoring PoE Extension
Active PoE Device Live Detection	Yes
PoE Power Recycling	Yes, daily or predefined schedule
PoE Schedule	4 schedule profiles
PoE Extend Mode	Yes, max. up to 250 meters Note: The transmission data rate and quality will depend on the PD devices
Layer 3 Function	
IP Interfaces	Max. 128 VLAN interfaces
Routing Table	Max. 128 static routing entries Max. 4K routing table entries
Routing Protocols	IPv4 RIPv1/v2 dynamic routing IPv4 OSPFv2 dynamic routing IPv6 OSPFv3 dynamic routing IPv4 hardware static routing IPv6 hardware static routing
Layer 2 Function	
Port Configuration	Port disable/enable Auto-negotiation 10/100/1000Mbps full and half duplex mode selection Flow control disable/enable Port link capability control
Port Status	Display each port's speed duplex mode, link status, flow control status, auto negotiation status, trunk status
Port Mirroring	TX / RX / Both Many-to-1 monitor RMirror – Remote Switched Port Analyzer (Cisco RSPAN) Supports up to 5 sessions
VLAN	IEEE 802.1Q tag-based VLAN IEEE 802.1ad Q-in-Q tunneling Private VLAN Edge (PVE) MAC-based VLAN Protocol-based VLAN Voice VLAN MVR (Multicast VLAN Registration) GVRP (GARP VLAN Registration Protocol) Up to 4K VLAN groups, out of 4096 VLAN IDs
Link Aggregation	IEEE 802.3ad LACP/static trunk Supports 14 trunk groups with 16 ports per trunk group
Spanning Tree Protocol	IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.1s Multiple Spanning Tree Protocol Supports 7 MSTP instances BPDU Guard, BPDU filtering and BPDU transparent Root Guard

IGMP Snooping	IPv4 IGMP (v1/v2/v3) snooping IPv4 IGMP querier mode support Up to 2K multicast groups
MLD Snooping	IPv6 MLD (v1/v2) snooping IPv6 MLD querier mode support Up to 512 multicast groups
Bandwidth Control	Per port bandwidth control Ingress: 10Kbps~13000Mbps Egress: 100Kbps~13000Mbps
Ring	Supports ERPS, and complies with ITU-T G.8032 Recovery time < 10ms @ 3 nodes Recovery time < 50ms @ 16 nodes Supports Major ring and sub-ring
Synchronization	IEEE 1588v2 PTP (Precision Time Protocol) Peer-to-peer transparent clock End-to-end transparent clock
QoS	Traffic classification based, strict priority and WRR 8-level priority for switching - Port number - 802.1p priority - 802.1Q VLAN tag - DSCP/TOS field in IP packet
Security Functions	
Access Control List	IP-based ACL/MAC-based ACL ACL based on: MAC Address IP Address Ethertype Protocol Type VLAN ID DSCP 802.1p Priority Up to 512 entries
Security	Port security IP source guard, up to 512 entries Dynamic ARP inspection, up to 1K entries Command line authority control based on user level Static MAC address, up to 64 entries
AAA	RADIUS client TACACS+ client
Network Access Control	IEEE 802.1x port-based network access control MAC-based authentication Local/RADIUS authentication
Management	
Basic Management Interfaces	Console; Telnet; Web browser; SNMP v1, v2c
Secure Management Interfaces	SSHv2, TLSv1.2, SNMP v3
System Management	Firmware upgrade by HTTP protocol through Ethernet network Configuration upload/download through HTTP Remote Syslog System log LLDP protocol NTP PLANET Smart Discovery Utility PLANET CloudViewer app

SNMP MIBs	<p>RFC 1213 MIB-II RFC 1493 Bridge MIB RFC 1643 Ethernet MIB RFC 2863 Interface MIB RFC 2665 Ether-Like MIB RFC 2819 RMON MIB (Groups 1, 2, 3 and 9) RFC 2737 Entity MIB RFC 2618 RADIUS Client MIB RFC 2863 IF-MIB RFC 2933 IGMP-STD-MIB RFC 3411 SNMP-Frameworks-MIB RFC 4292 IP Forward MIB IEEE 802.1X PAE RFC 4293 IP MIB RFC 4836 MAU-MIB IEEE 802.1X PAE LLDP PowerEthernet MIB</p>
Standards Conformance	
Regulatory Compliance	<p>FCC Part 15 Class A CE: EN55032 EN55035</p>
Standards Compliance	<p>IEEE 802.3 10BASE-T IEEE 802.3u 100BASE-TX/100BASE-FX IEEE 802.3z Gigabit SX/LX IEEE 802.3ab Gigabit 1000T IEEE 802.3ae 10Gigabit Ethernet IEEE 802.3x flow control and back pressure IEEE 802.3ad port trunk with LACP IEEE 802.1D Spanning Tree Protocol IEEE 802.1w Rapid Spanning Tree Protocol IEEE 802.1s Multiple Spanning Tree Protocol IEEE 802.1p Class of Service IEEE 802.1Q VLAN tagging IEEE 802.1ad Q-in-Q VLAN stacking IEEE 802.1X Port Authentication Network Control IEEE 802.1ab LLDP IEEE 802.3ah OAM IEEE 802.3af Power over Ethernet IEEE 802.3at Power over Ethernet Plus IEEE 802.3bt Power over Ethernet Plus Plus IEEE 802.3az Energy-Efficient Ethernet IEEE 1588 PTPv2 RFC 768 UDP RFC 783 TFTP RFC 791 IP RFC 792 ICMP RFC 2068 HTTP RFC 1112 IGMP v1 RFC 2236 IGMP v2 RFC 3376 IGMP version 3 RFC 2710 MLD version 1 RFC 3810 MLD version 2 RFC 2328 OSPF v2 RFC 5340 OSPF v3 RFC 2453 RIP v2 ITU-T G.8032 ERPS Ring</p>
Environment	
Operating Temperature	-40 ~ 75 degrees C
Storage Temperature	-40 ~ 85 degrees C
Humidity	5 ~ 95% (non-condensing)

Dimensions

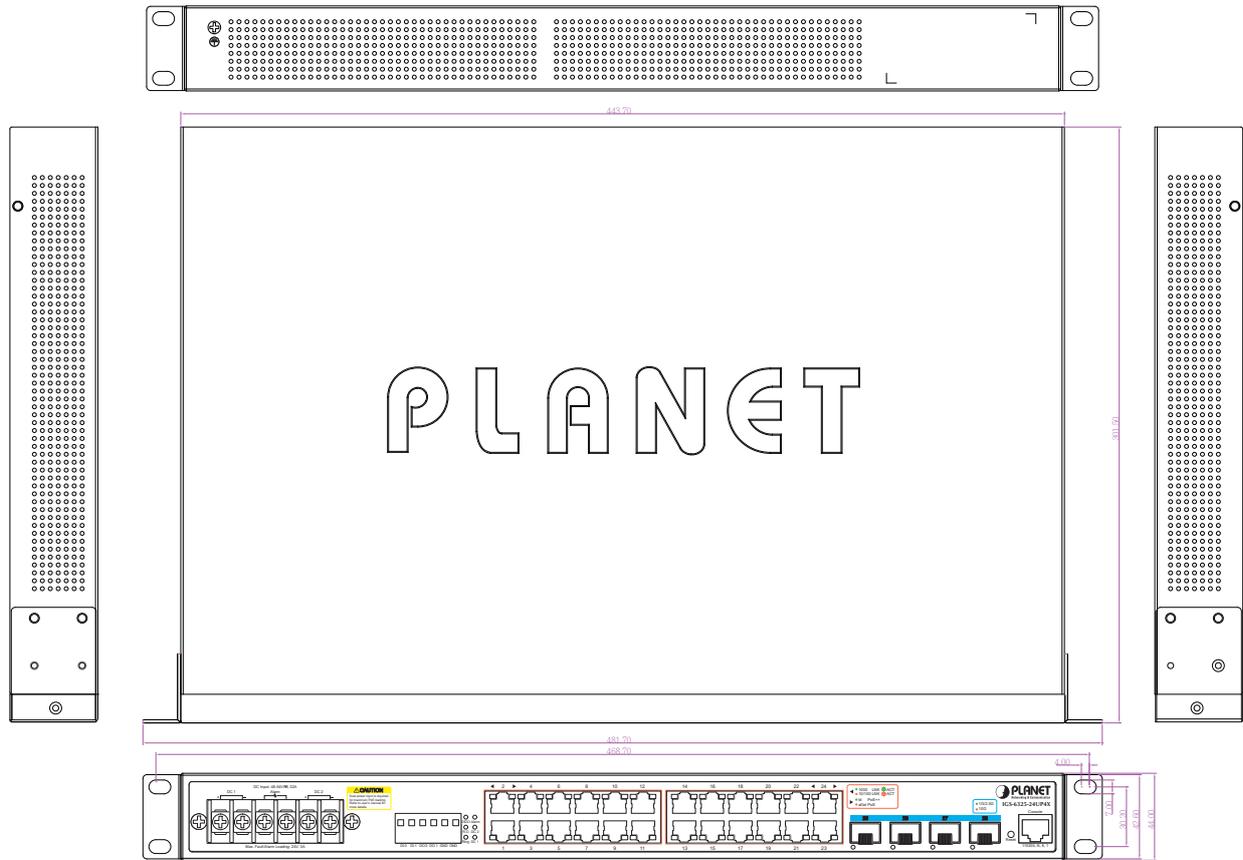

Unit: mm

Ordering Information

IGS-6325-24UP4X	Industrial L3 24-Port 101001000T 802.3bt PoE + 4-Port 10G SFP+ Managed Ethernet Switch (-40~75 degrees C)
-----------------	---

Related Products

IGS-6325-24P4X	Industrial L3 24-Port 10/100/1000T 802.3at PoE + 4-Port 10G SFP+ Managed Ethernet Switch (-40~75 degrees C)
IGS-6325-24P4S	Industrial L3 24-Port 10/100/1000T 802.3at PoE + 4-Port Shared 100/1000X SFP Managed Ethernet Switch (-40~75 degrees C)
IGS-6325-16P4S	L3 Industrial 16-Port 10/100/1000T 802.3at PoE + 4-Port 100/1000X SFP Managed Ethernet Switch (-40~75 degrees C)
IGS-6325-20T4C4X	Industrial L2+ 20-Port 10/100/1000T + 4-Port TP/SFP Combo + 2-Port 10G SFP+ Managed Ethernet Switch (-40~75 degrees C)
IGS-6325-20S4C4X	Industrial L3 20-Port 100/1000X SFP + 4-Port Gigabit TP/SFP + 4-Port 10G SFP+ Managed Ethernet Switch
CB-DASFP-0.5/2M	10G SFP+ Directly-attached Copper Cable (0.5/2M in length)
MTB Series Transceivers	10GBASE-LR/SR/BX/T Modules
MGB-2G Series Transceivers	2500BASE-X SFP Transceiver
MGB Series Transceivers	1000BASE-SX/LX SFP Transceiver
MFB-Series Transceivers	100BASE-FX SFP Transceiver
PWR-120-48/PWR-240-48/ PWR-480-48/PWR-960-48	DC Single Output Industrial DIN-rail Power Supply Units

PLANET Technology Corporation

11F., No.96, Minquan Rd., Xindian Dist., New Taipei City
231, Taiwan (R.O.C.)
Tel: 886-2-2219-9518 Fax: 886-2-2219-9528
Email: sales@planet.com.tw www.planet.com.tw



PLANET reserves the right to change specifications without prior notice. All brand names and trademarks are property of their respective owners. Copyright © 2023 PLANET Technology Corp. All rights reserved.

IGS-6325-24UP4X